


TIME CODE Instructions

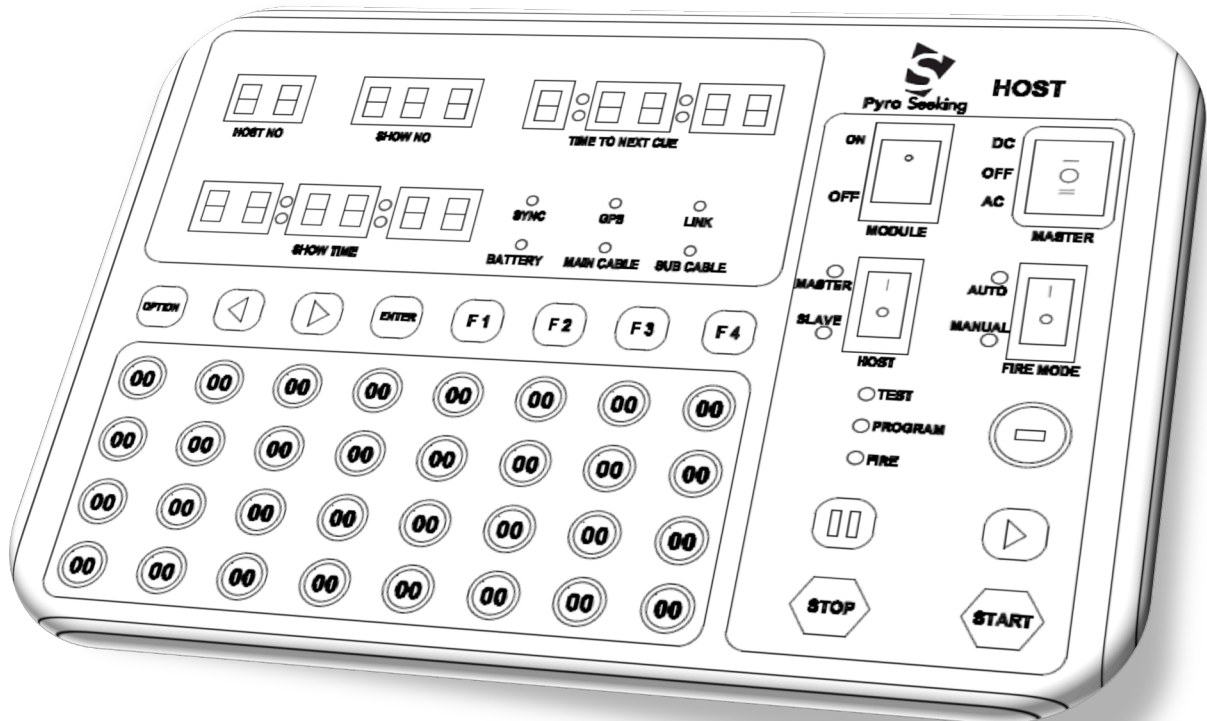

Pyro Seeking HOST can decode FSK Time Code from Pyro Seeking FSK or PD FSK. This Time code can be transmitted over Voice grade communications via Radio, Telephone or Hardwire from a play back device. The inputs are both Balanced 3-pin XLR and or un balanced audio RCA Audio Connector on the top of the HOST.

TIME CODE TESTING of the HOST:

1. Turn the Host on and set the Key Switch to the PROGRAM MODE
2. Connect your audio cables from your audio source into the Host
3. When the Time Code playback device is activated the sync green light will flash and the SHOW TIME display will show the External Time Code supplied.

IMPORTANT !!! The Time Code Displayed on the HOST will always be 1 second behind the Play back device clock counter or .wav or mp3 file times. This automatically achieved in the firmware of the Host and will apply to all external time code sources.